PRODUCT SPECIFICATIONS

STANDARD CONSTRUCTION

OUTSIDE CASING /TOP 30 GAUGE HOT -DIPPED GALVANIZED STEEL

PERIMETER FLANGE:

30 GAUGE HOT DIPPED GALVANIZED STEEL COLLAR: 30 GAUGE HOT DIPPED GALVANIZED STEEL

INSULATION:

R4.2,R6 OR R8 BLACK DIFFUSER BOARD

OPTIONS:

W/ OUT COLLAR (R4/R6/R8SRBU) W/ GASKET (R4/R6/R8SRBG) **CUSTOM SIZES AVAILABLE**

STANDARD SIZES:

WXHXD
6"X 4"X 4"
6"X 6"X 4"
6"X 6"X 5"
6"X 6"X 6"
8"X 4"X 4"
8"X 4"X 5"
8"X 8"X 7"
8"X 8"X 8"
10"X10"X 7"
12"X 6"X 6"
12"X 6"X 7"
12"X 8"X 7"
12"X 8"X 8"
12"X12"X 8"
14"X 6"X 6"
14"X 6"X 7"
14"X 8"X 7"
14"X 8"X 8"
14"X14"X 7"
14"X14"X 8"
16"X 8"X 7"
16"X 8"X 8"
16"X16"X 7"
16"X16"X 8"
18"X18"X 7"
18"X18"X 8"
24"X24"X 7"

JOB NAME:	
LOCATION:	
ARCHITECT:	
ENGINEER:	
CONTRACTOR:	

CONTACT MIAMI TECH INC. FOR ADDITIONAL INFORMATION OR WITH SPECIAL REQUIREMENTS.

3611 NW 74TH ST MIAMI, FL 33147 93–7054 FAX: 305–693–6152 PHONE: 305-693-7054

WEB: WWW.MIAMITECH.COM

EMAIL: SALES@MIAMITECH.COM

FEATURES

1" PERIMETER FLANGE PROVIDED FOR EASY INSTALLATION

DESIGN INCLUDES 1/2" DRYWALL LIP AND ROUNDED CORNERS FOR ADDED SAFETY


OPENING 1/4" OVERSIZED TO ACCOMMODATE REGISTER /GRILLE.


COLLAR INSTALLED WITH EXPANSION LOCK AND THEN SEALED AIR TIGHT WITH HOT MELT GLUE.

DUAL BEAD BOX DESIGN FOR ADDED STRENGTH.

BOX DEPTH IS 11 $\frac{1}{2}$ " FOR COLLARS 8" AND LARGER. BOX DEPTH IS $9\frac{1}{4}$ " FOR COLLARS 7" AND SMALLER.

BLACK DIFFUSER BOARD COATED WITH EPA-REGISTERED, ANTI-MICROBIAL, PROTECTIVE ACRYLIC AGENT ALONG AIR STREAM SIDE.

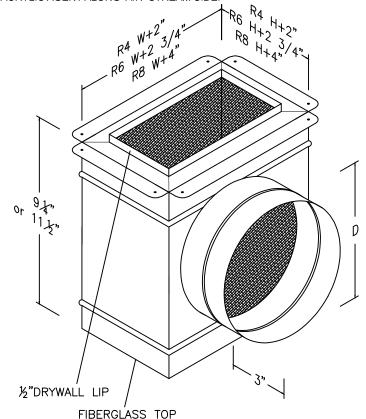



R4/R6/R8SRB

SIDE OUTLET FLANGED REGISTER BOX WITH COLLAR PRODUCT SPECIFICATIONS

्रिकेर <u>miami tech inc.</u> 01/06/2009 NÕT TO SCALE ΑF R4R6R8SRB IV 01/06/2009

NOTE: ALL DRAWINGS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.